

# D Montage Pressflansch Ecoguss/Practicus

GB Assembly of pressure sealing flange for Ecoguss and Practicus

F Montage bride de pression compression Ecoguss/Practicus

I Montaggio flangia a pressione Ecoguss/Praticus

NL persafdichtingsflens Ecoguss / Practicus

PL Montaż dociskowego kołnierza uszczelniającego Ecoguss/Practicus

Art. Nr. 48402






no. art 48402

Art Nr 48402

cod. art. 48402

art.nr 48402

Art. nr48402

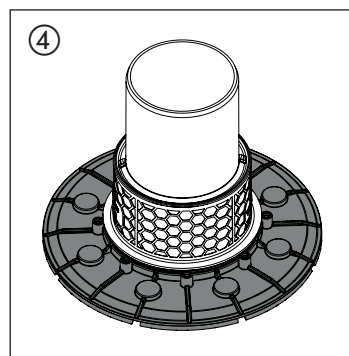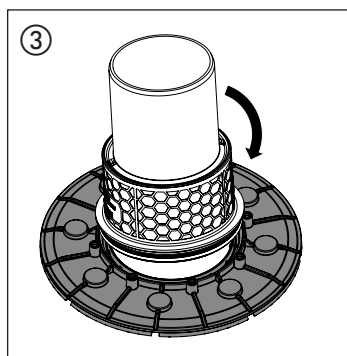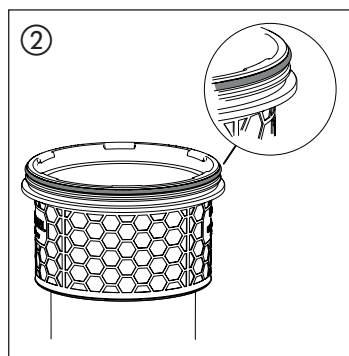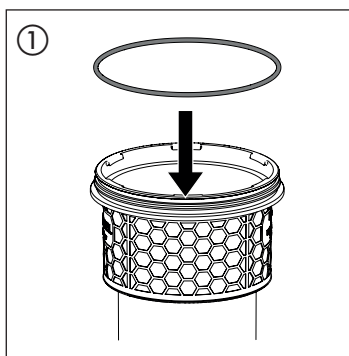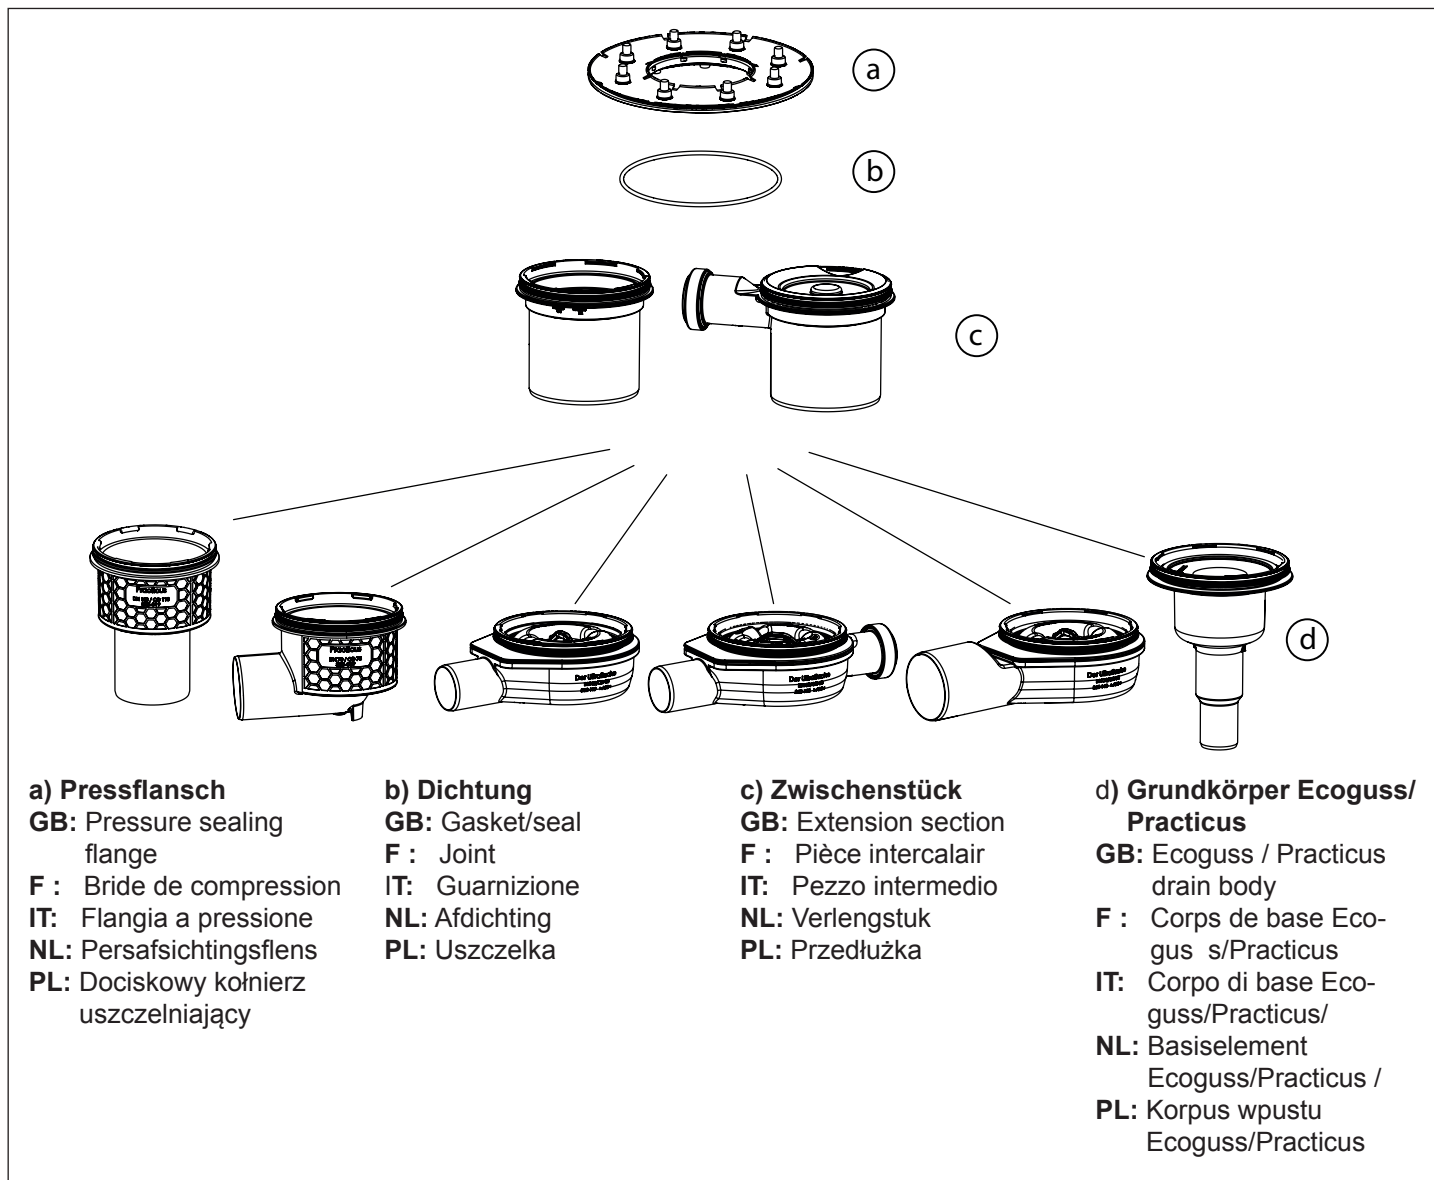

Maximale Belastung 70 kg / GB: maximum load class 70 kg F : Classe de charge maximale 70 kg /  
IT: Carico massimo 70 kg / NL: Maximale belastingsklasse 70 kg / PL: Maksymalna klasa obciążenia 70 kg